

# GVL 8401-K-RC V2



## Performance features

- » Compact ventilation control panels with an integrated wireless receiver for controlling 24 V DC window drives
- » Up to 1 A total drive current
- » 2 ventilation groups
- » Optional individual and/or control circuit (OPEN / CLOSED)
- » Configurable ventilation safety function (storage operation OPEN / CLOSED)
- » Freely programmable group assignment for central inputs (weather, time, etc.)
- » Operation via wireless remote control (Multiple control panels can be controlled with one remote control)
- » 868 MHz radio frequency, permitted throughout the EU
- » High level of security against external control - 24 bit address code and transmitting code change at each button press (hopping code)

## Accessories


### Operation elements



### Weather sensors



# Example of application

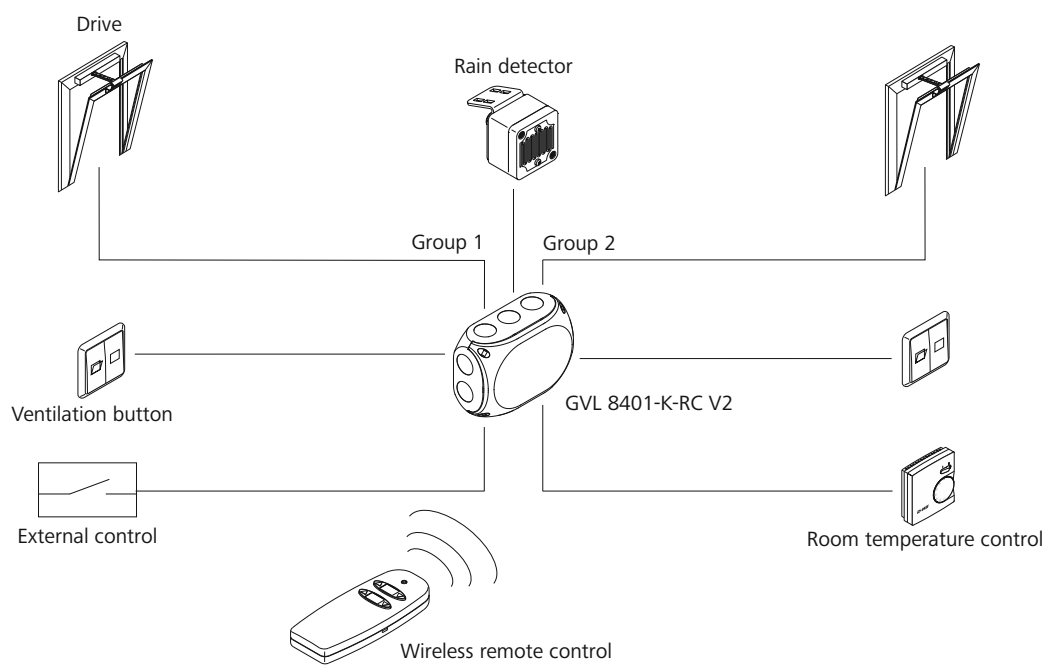

## Technical data

GVL 8401-K-RC V2	
Supply	230 V AC / 50 Hz / 56 VA
Stand-by power	< 1 W
Output	24 V DC / 1 A
Mode of operation	Short-time duty 20 % duty cycle
Type of protection	IP 66
Temperature range	-5 °C ... +40 °C
Housing	Polypropylene
Colour	Light grey (~ RAL 7035)
W x H x D	180 x 130 x 77 mm
Weight	0.97 kg

## Design

Type	Art. No.
GVL 8401-K-RC V2	30.241.90